

WIRELESS AUDIO

Our All-in-one Wireless IP44 Bluetooth 5 Ceiling Speakers allow you to play Apple Music, Amazon Music, Spotify or any other audio streaming service from your phone. We combine an Amplifier, Bluetooth Receiver, and a High-Quality Speaker, to offer you the ideal All-in-one Solution for your property.





Qualcomm[®] aptX[®] Low Latency













Features

Bluetooth 5.0 with a 30m connection

All in one Built in Amplifier and Bluetooth

Easily connect to plug socket or existing lighting circuit

Frameless protective metal grille, magnetically attaches to the speaker

Works with Google Home Mini (no pin required)

Works with Amazon Echo dot (no pin required)

Connectivity

Works with any Bluetooth v5.0 device (backwards compatible)

aptX low latency chipset

Wireless Range: Up to 30 metres (with compatible Bluetooth V5.0 devices)

Autodetects RCA connection for TV, Amplifier, etc

Output for additional Passive slave speaker

Lithe LINK connect upto 3 master BT speaker to

Audio Spec

Woofer: 6.5" Polypropylene Cone

Tweeter: 0.75" Titanium Cone

Mono/Stereo Switch

RMS Power: 50W RMS

Impedance: 8 Ohms

Sound Quality THD+N 0.009%, 55Hz-20kHZ

Sensitivity (IW/Im): 90dB


Audio Sample Rate: 8Khz


Digital Class D Amplifier





SPECIFICATIONS / FEATURES

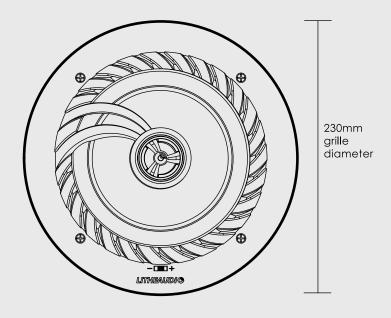

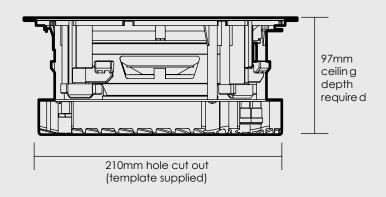

SPECIFICATIONS / FEATURES

Bluetooth 5.0 with a 30m connection

All in one Built in Amplifier and Bluetooth

Easily connect to plug socket or existing lighting

Frameless protective metal grille, magnetically attaches to the speaker

Any Electrician can fit within 30 minutes

Works with Google Home Mini (no pin required)

Works with Amazon Echo dot (no pin required)

Connectivity

Works with any Bluetooth v5.0 device (backwards compatible)

aptX low latency chipset

Wireless Range: Up to 30 metres (with compatible Bluetooth V5.0 devices)

Autodetects RCA connection for TV, Amplifier, etc

Output for additional Passive slave speaker

Lithe LINK connect upto 3 master BT speaker to play on all

Audio Spec

Woofer: 6.5" Polypropylene Cone

Tweeter: 0.75" Titanium Cone

Mono/Stereo Switch

RMS Power: 50W RMS

Impedance: 8 Ohms

Sound Quality THD+N 0.009%, 55Hz-20kHZ

Sensitivity (1W/1m): 90dB

Audio Sample Rate: 8Khz

Digital Class D Amplifier

Speaker Spec

210mm cut-out diameter

Weight: 3.7kg

Features

Power Supply: DC24V / 2.5A

Dimensions: (W x D) 230 x 97 mm

Operating Temperature: 0° to 40° C

Storage Temperature: -20° to 70° C

Limited Warranty: 2 Year

What's in the box

IP44 BT 5 Ceiling Speaker

Power Supply

Cutting template

Instruction manual

Included in pair kit (03211)

5m Speaker Cable (SKU 03211)

IP44 Passive Ceiling Speaker (SKU 03211)

SKU Codes

03210 Bathroom Single (Master)

03211 Bathroom Pair Kit (Master + Passive)



