






	Miniature Circuit Breaker 6kA 1 pole B CURVE								
RATING (A)	6	10	16	20	25	32	40	50	63
PART NUMBER	MT06B061	MT06B101	MT06B161	MT06B201	MT06B251	MT06B321	MT06B401	MT06B501	MT06B631
GTIN-13	5060523520206	5060523520213	5060523520220	5060523520237	5060523523108	5060523520244	5060523520251	5060523520268	5060523523368
STANDARD	IEC/EN 60898-1								
NUMBER OF POLES	1								
RATED VOLTAGE (Un/AC)	230V								
FREQUENCY (Hz)	50/60								
RATED BREAKING CAPACITY (Icn)	6000A (6kA)								
RATED CURRENT (In)	6, 10, 16, 20, 25, 32, 40, 50, 63								
TRIPPING CHARACTERISTICS	B CURVE : 3-5In								
MECHANICAL ENDURANCE	10,000								
PROTECTION DEGREE (IP)	20								
MAXIMUM TERMINAL CAPACITY	16mm <sup>2</sup>								
RECOMMENDED TIGHTENING TORQUE (Nm)	2.5								
TRIPPING TYPE	Thermal magnetic								
MOUNTING	35mm din rail								
MATERIAL	PA6 (Nylon 6)								
WEIGHT (1PC) Kg	0.12								
INNER CARTON QUANTITY	12								
OUTER CARTON QUANTITY	120								
ORIGIN OF MANUFACTURE	CHINA								



DIMENSIONS

1 POLE

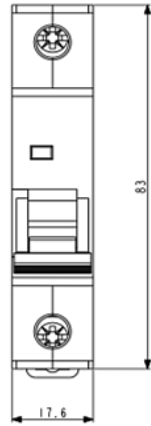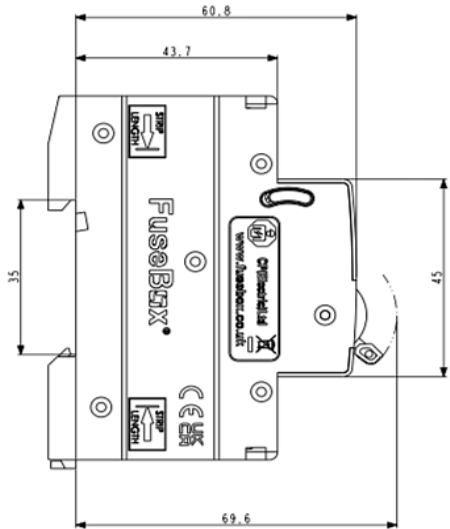

TRIPPING CHARACTERISTICS

B curve 3-5I<sub>n</sub>

Curve B

