


SPECIFICATION



Selene 2 LED Panel

TP(a), 3CCT, 2 Power UGR19

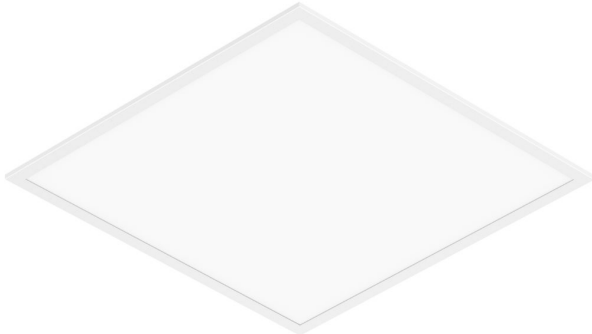

Beam Angle

110°



Input

220-240V



Life Hours

50000



Dimmable

No



Colour Temperature

3000K 4000K 6500K



	600 x 600	1200 x 600
Part Number	SE2A-36TU	SE2A-126TU
TP Rating	TP(a)	TP(a)
UGR	UGR19	UGR19
Selectable Power	25/36W	38/56W
Max Power	36W	56W
Max Lumens	3600	5800
Dimensions (mm)	595 x 595 x 32	1195 x 595 x 33
CCT	3000K 4000K 6500K	3000K 4000K 6500K
Order Multiples	1	1
Surface Mounting Kits	SE2-CWM66	SE2-CWM126
Self Test Emergency Kit	SE-EM3W	
Panel Power	3-100W	
Output V	9-80W	
Output A	30-70mA	

Key Features

- Selectable 3 colour temperatures
- Selectable Power Option
- TP(a) Panel with UGR19 as Standard
- Back Lit Panel
- Self Test Emergency Available
- Flicker free
- Surface Mount Kits Available
- 5 year warranty



Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk