




Saxon RGB Floodlight Instructions



IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution, risk of electric shock.

MAINS WIRING Cable colours are shown opposite.

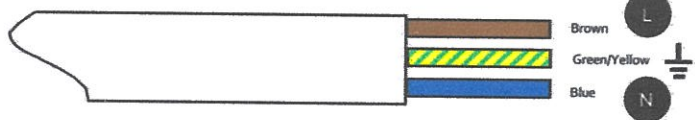

The Saxon II is a Class I product and must be earthed

Full RF wireless remote control

340° fixing bracket rotation

CE Approved. 100-240VAC supply

IP65 rated.

Beam angle 120°

Available in 30 Watt, LED—RGB

Remote Control functions

Power on & off

Brightness control, up & down

RGB & W Selects primary colours, the other nine colours allow intermediate selection

Flash Instant colour change from one to the next

Strobe High speed colour change

Fade Gradual transition from one colour to the next

Smooth (Party Mode) Instant primary colour changing mode, no fade or transition. After 10 seconds the Saxon cycles through all of the effect modes

NOTE

In manual colour select mode, when switched off, the last selected colour will automatically be restored.

The Saxon Wireless remote control offers full synchronisation when two or more Saxons are within 20 meters of each other.

