




Tatton Floodlight Instructions



IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution, risk of electric shock.

MAINS WIRING Cable colours are shown opposite.

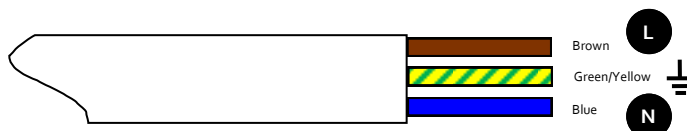

The Tatton is a Class I product and must be earthed. Available with or without PIR Detector with black body. PIR detection distance: 8m max Mounting height: 2-4m. Time delay 10 sec. to 10 min. Adjustable sensitivity and day/night operation. PIR versions have a fourth black wire providing manual over-ride, connection diagram below.

CE Approved. 220-240VAC Supply. IP65 rated without PIR, IP44 with PIR
Available in 10, 20, 30 & 50Watt, LED—6000K. (Excludes 10 watt with PIR)

PLEASE NOTE

Slaving off the PIR black 4th wire is not permitted unless connected via an auxiliary contactor.

