



BLUETOOTH

CEILING SPEAKER



WIRELESS AUDIO

Our All-in-one Wireless Bluetooth 5 Ceiling Speakers allow you to play Apple Music, Amazon Music, Spotify or any other audio streaming service from your phone. We combine an Amplifier, Bluetooth Receiver, and a High-Quality Speaker, to offer you the ideal All-in-one Solution for your property.


 **Bluetooth 5.0**

30_m
RANGE



Qualcomm[®] aptX[™]
Low Latency

 **LINE-IN**

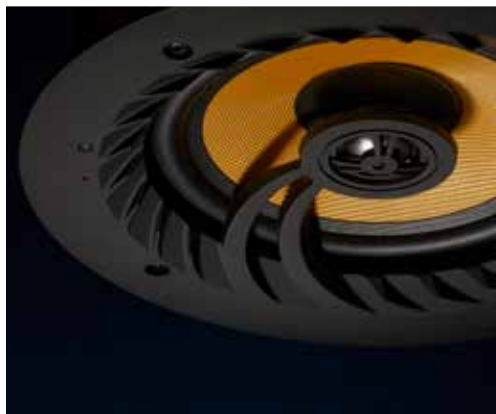

LITHEAUDIO 



Features

- Bluetooth 5.0 with a 30m connection
- All in one Built in Amplifier and Bluetooth
- Easily connect to plug socket or existing lighting circuit
- Frameless protective metal grille, magnetically attaches to the speaker
- Works with Google Home Mini (no pin required)
- Works with Amazon Echo dot (no pin required)

Connectivity

- Works with any Bluetooth v5.0 device (backwards compatible)
- aptX low latency chipset
- Wireless Range: Up to 30 metres (with compatible Bluetooth v5.0 devices)
- Autodetects RCA connection for TV, Amplifier, etc
- Output for additional Passive slave speaker
- Lithe LINK connect upto 3 master BT speaker to play on all

Audio Spec


- Woofer: 6.5" Woven Glass Fiber cone
- Tweeter: 0.75" Titanium Cone
- Mono/Stereo Switch
- RMS Power: 50W RMS
- Impedance: 8 Ohms
- Sound Quality THD+N 0.009%, 55Hz-20kHz
- Sensitivity (1W/1m): 90dB
- Audio Sample Rate: 8Khz
- Digital Class D Amplifier

litheaudio.com/bluetooth

Visit our website or open you phone's camera and scan the QR code to visit our product page



SPECIFICATIONS / FEATURES

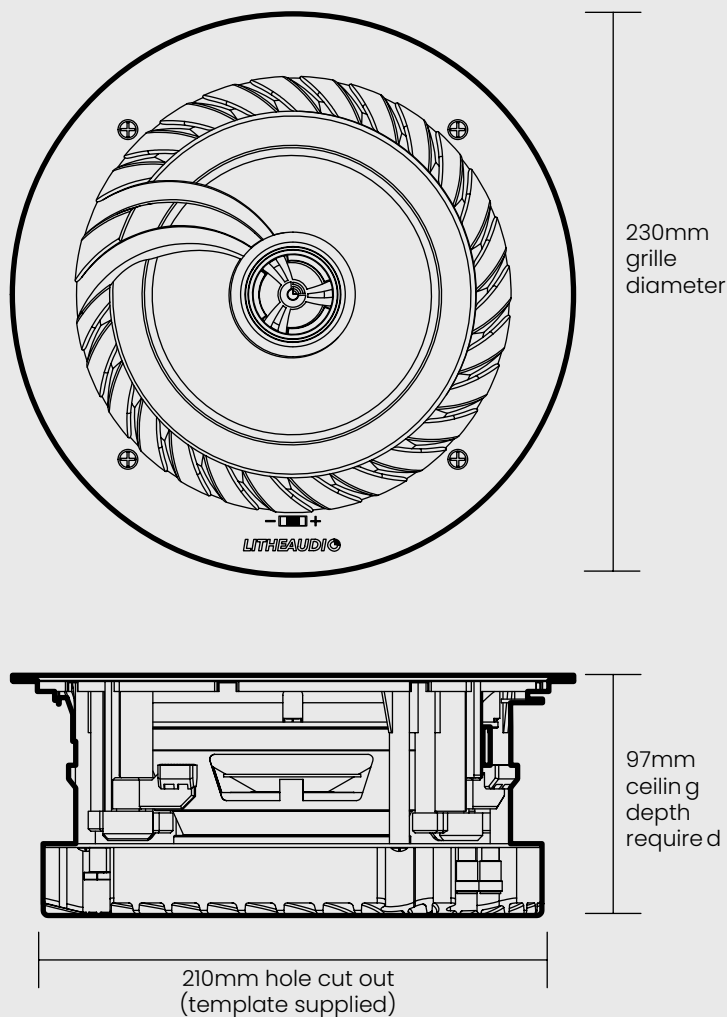

Speaker Spec

210mm Cut-Out Diameter
 Weight: 3.7kg
 Power Supply: DC24V / 2.5A
 Dimensions: (W x D) 230 x 97 mm
 Operating Temperature: 0° to 40° C
 Storage Temperature: -20° to 70° C
 Limited Warranty: 2 Year

Perfect for

Kitchens
 Bedrooms
 Home Office
 Connecting To Your TV

What's in the box

Bluetooth 5 Ceiling Speaker
 Power Supply
 Cutting Template
 Instruction Manual

Extras included in pair kit (03201)

5m Speaker Cable
 Passive Ceiling Speaker

Hotel & apartment features

Renaming service to change speaker name
 Change PIN to a unique number
 Volume capping switch to reduce volume by 50%

Setup APP

Change Pin / Name
 Adjust RCA volume
 IOS & Android version available

SKU Codes

03200 Bluetooth Single (Master)
 03201 Bluetooth Pair Kit (Master + Passive)

litheaudio.com/bluetooth

Visit our website or open you phone's camera and scan the QR code to visit our product page

